


CUSTOMBIKERSTUFF.COM
SPIRIT 1100 – THIS WORKS ON OTHER BIKES ALSO
SPEEDOMETER REMOVAL

Step #1


Unscrew the speedometer cable first (see arrow). Then unscrew the two mounting screws (see circles and pic below). Then slide the unit up and partially out to expose the wires for step 2. These mounting screws have a rubber o'ring underneath it. Be careful to lose this or damage the o'ring.

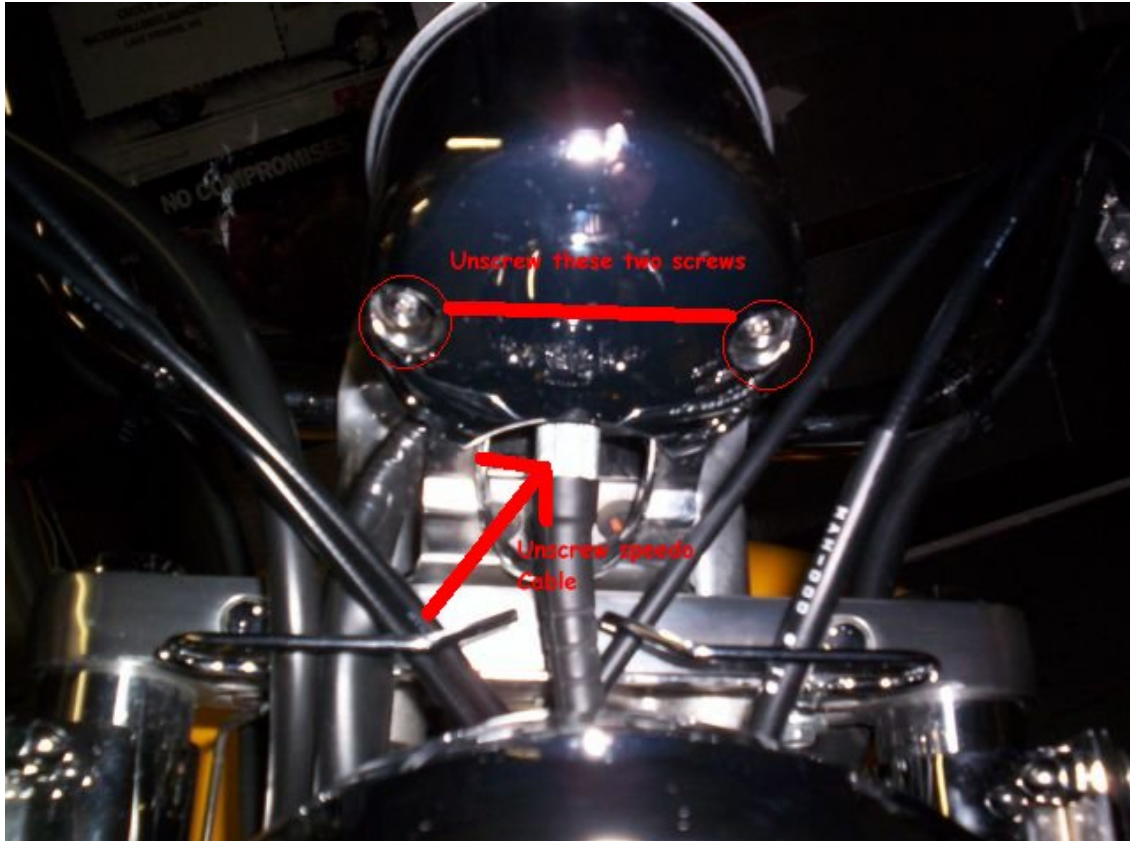

CUSTOMBIKERSTUFF.COM
SPIRIT 1100 – THIS WORKS ON OTHER BIKES ALSO
SPEEDOMETER REMOVAL

Step 2

Disconnect the speedo electrical connection and then pull the speedo light bulb from speedo housing. See pic below for examples.

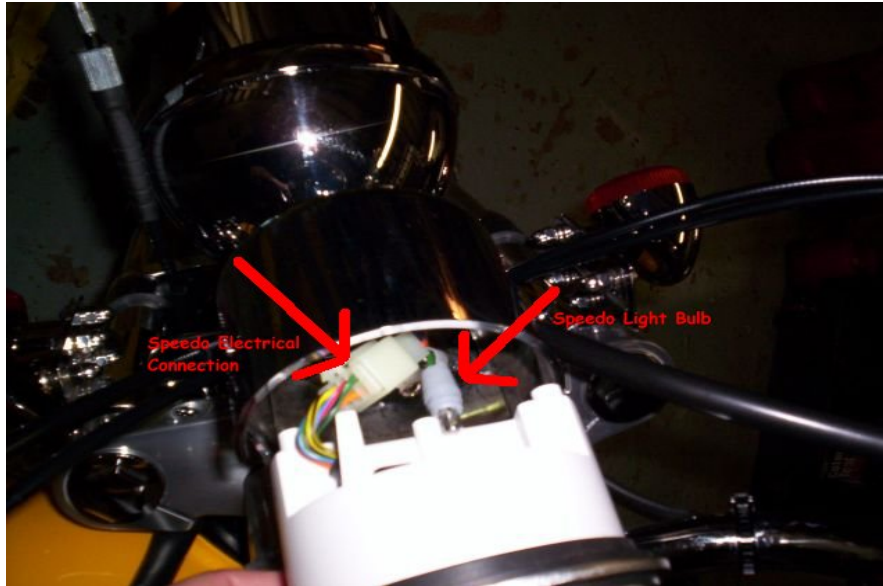

Step #3

Now that you have the speedo off the bike, you must use a small Phillips screwdriver and carefully unscrew the trip knob and pull the knob out of the housing.

NOTE: The trip knob only fits on this unit one way. Please note the notch on the knob and on the housing unit pin. Also note, you can do this on the bike prior to taking it off the bike if you choose. You will notice in the picture that I took the housing ring that connects to the lower instrument panel off. This is not a necessary step.



CUSTOMBIKERSTUFF.COM
SPIRIT 1100 – THIS WORKS ON OTHER BIKES ALSO
SPEEDOMETER REMOVAL

IS IT OKAY TO TOUCH OR CLEAN OFF THE UNDERSIDE OF THE GLASS OF MY SPEEDO?

We at Custom Biker Stuff have just come across some information that we cannot confirm or deny, but we are told that the oil on the underside of the speedo glass is an antifogging agent provided at the factory when they put the speedo together. We are providing this information for your protection. We post this information as an FYI.

1. Double check for any dust on the new faceplate, **DO NOT** clean the glass on the inside before putting it back together. Dust materializes out of nowhere, static can bring it on quick, so be very careful after you remove the speedometer bezel, don't cover it with a towel that may have lint on it. Turn it face down on a sturdy table, and do not touch the inside of the glass for any reasons. (If dust is present, do not blow it off using your mouth, or an air compressor; they both will 'spit' water on it, which can ruin the factory anti-fogging agent. Use "DUST-OFF!" in a can).

Obviously if your speedo is already fogging, disregard this comment. We have found that antifogging agent may help when putting your speedo back together.